


ENGINEERING SPECIFICATIONS REFERENCE

- 1. Number of Ports : 3 ports
- 2. Number of Positions : 2 positions
- 3. Valve Function : Single Solenoid, Multi-purpose
- 4. Piping Type : Cartridge, Insert Piping
- 5. Media : Air, Inert Gas, Vacuum
- 6. Type of Operation : Direct Acting Type
- 7. Flow Capacity (Cv) : 0.2
- 8. Lubrication : Not Required
- 9. Media Filtration : 40 Micron Recommended
- 10. Pressure Range (psi) : 28"Hg - 30 psi
- 11. Operating Speed (cycles/min) : 600
- 12. Ambient Temperature Range (deg F) : 32~ 125
- 13. Wetted Materials : Acetal, LCP, SST, NBR
- 14. Weight (oz) : 0.43
- 15. Electrical Entry : Axial Plug-In Receptacle w/30cm lead wires


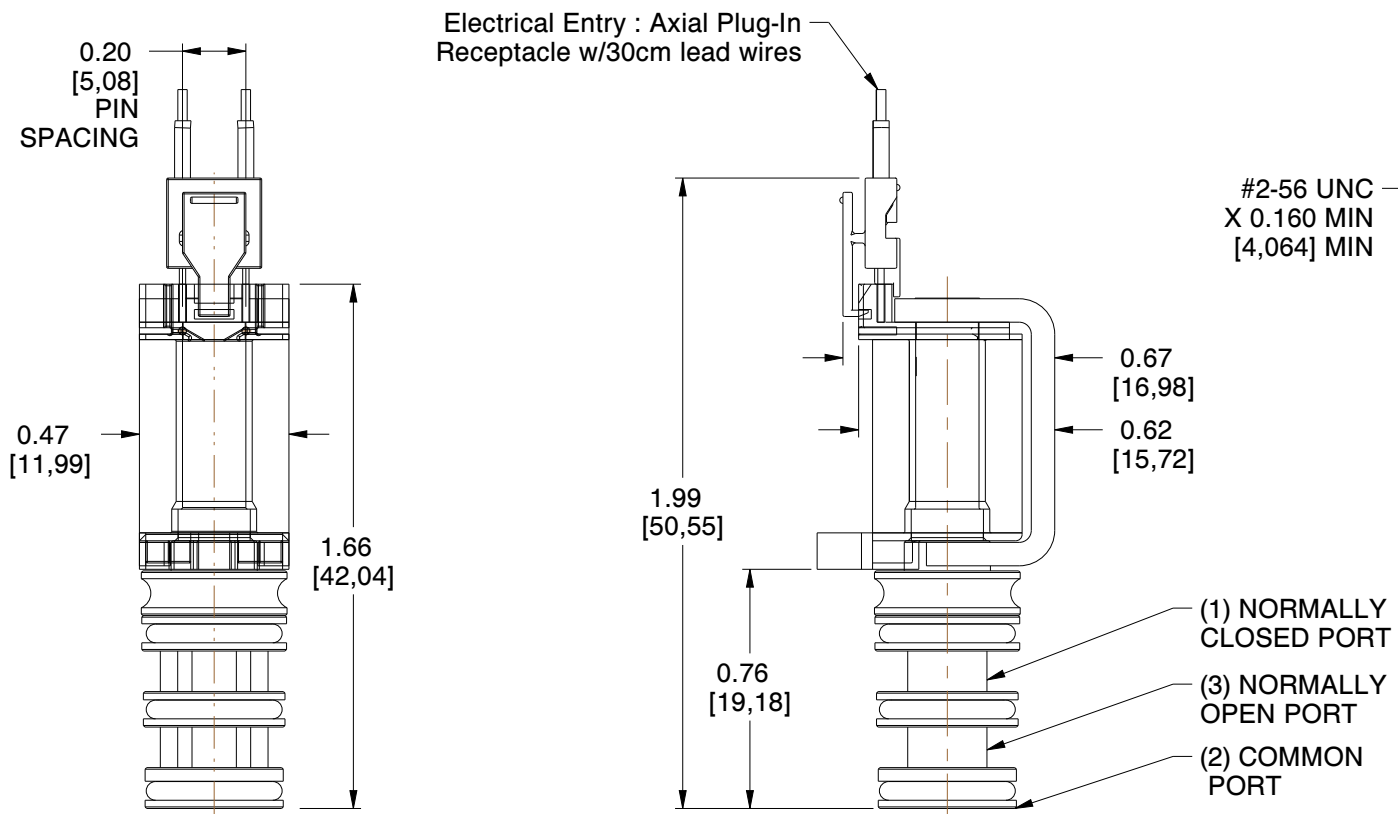


MANIFOLD INTERFACE DIMENSIONS

#2-56 UNC
X 0.160 MIN
[4,064] MIN

Ø 0.640
[16,256]

- (1) NORMALLY CLOSED PORT
- (3) NORMALLY OPEN PORT
- (2) COMMON PORT

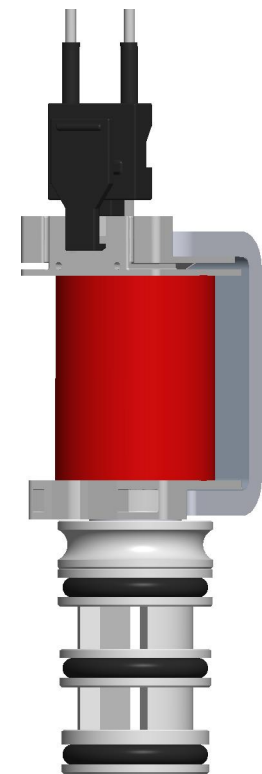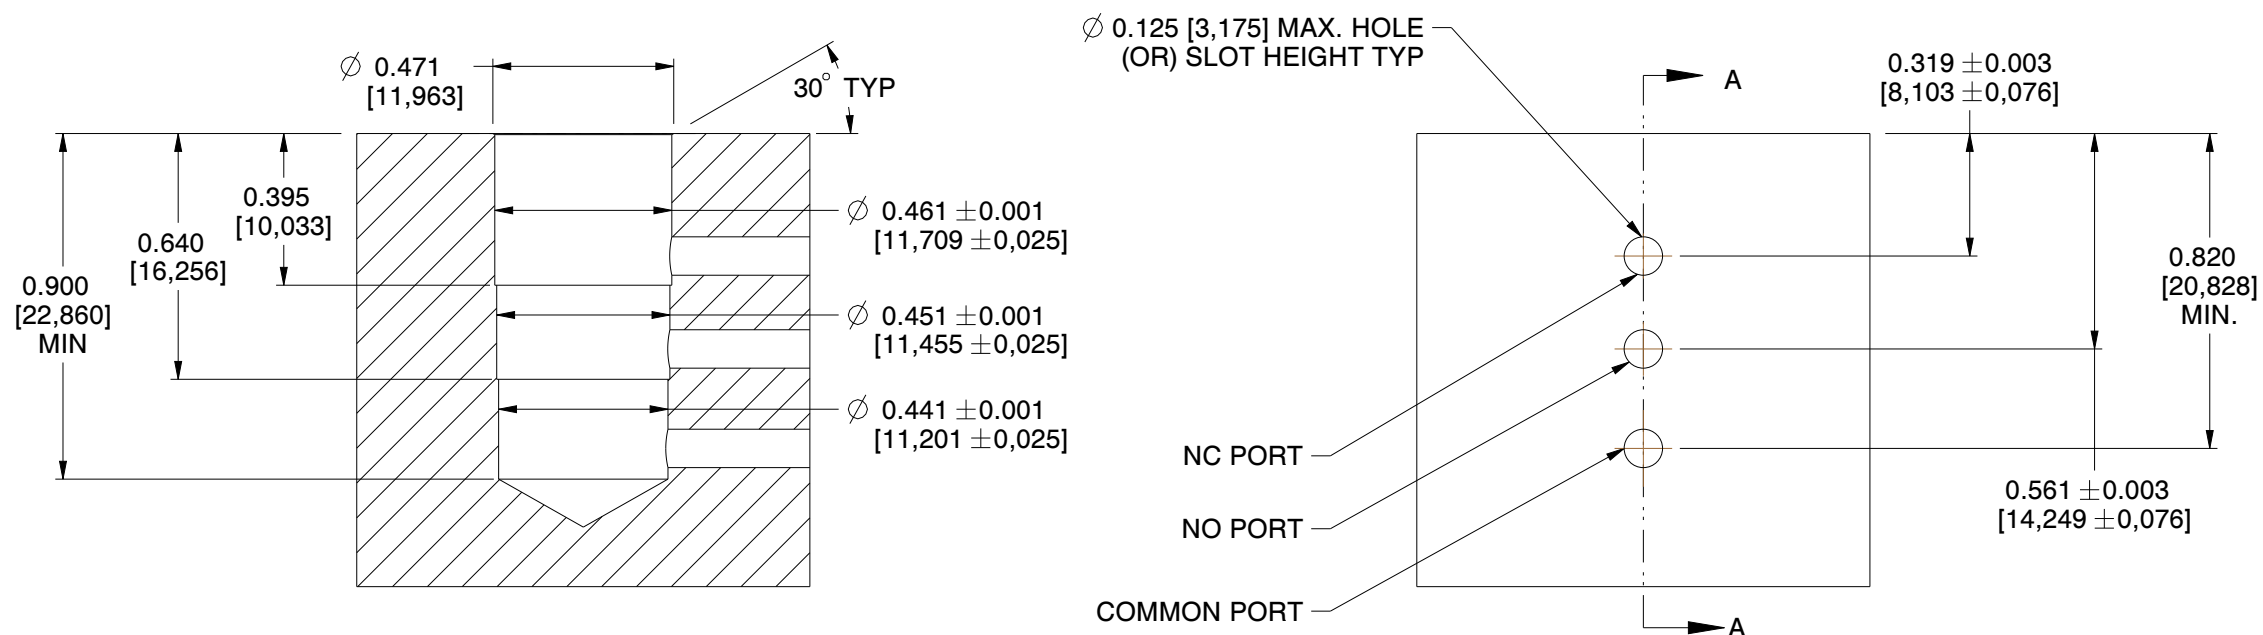

Humphrey®

HUMPHREY PRODUCTS COMPANY
5070 EAST N AVE; KALAMAZOO, MI 49048 USA
PH: 269-381-5500; FX: 269-381-4113
WWW.HUMPHREY-PRODUCTS.COM
EMAIL: TECHSERVICE@HUMPHREY-PRODUCTS.COM

UNCONTROLLED IF PRINTED - FOR REFERENCE ONLY

DIMENSIONS IN INCHES (MM). FOR DETAILS, PLEASE REFER TO PRODUCT PAGE, HUMPHREY ONLINE CATALOG. HUMPHREY RESERVES RIGHT TO CHANGE DIMENSIONS, SPECIFICATIONS.

CUSTOMER REFERENCE DRAWING

C127A4

Date created: 20-02-2020 Date printed : 20-02-2020 SCALE: 1.65