

-5°C ÷ 60°C



Working pressure:
from 0 to 16 Bar



Water and fluids suitable with
construction materials

FLOW DROP

12 % approximated



Taper gas BSPT ISO 7
R1/8" and R1/4"

- Body: Polypropylene
- Handle: Polypropylene
- Nut: Polypropylene
- O-ring: EPDM




Products in compliance with
EC Regulation 1907/2006



Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

Handle

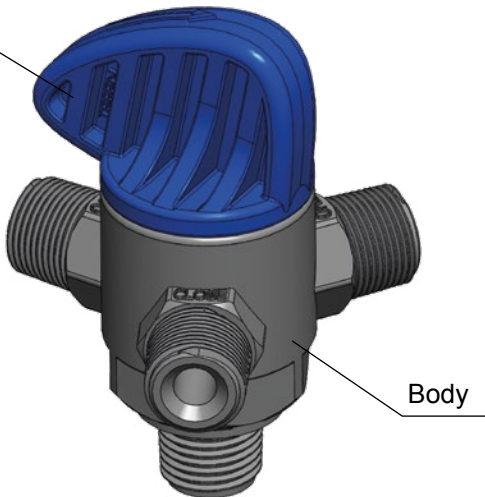


HANDLE

Three-position handle.
In the intermediate positions the valve is totally closed.



9030


Triotech polypropylene valve, male BSPT thread

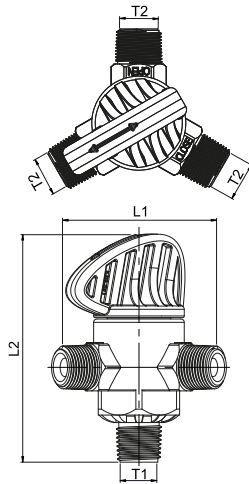

CODE	T1	T2	L1	L2	g
9030TR18	R 1/4"	R 1/8"	49,7	68,3	70,0
9030TR14	R 1/4"	R 1/4"	52,0	68,3	70,0

9031

Triotech polypropylene valve, BSPT thread for 8/5.5 tubes

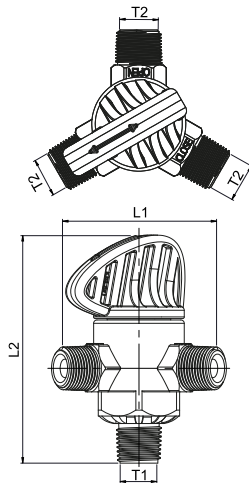

CODE	T1	T2	L1	L2	g
9031TR8	R 1/4"	8/5,5	51,7	58,8	70,0

