

COILS	voltage	power		class	ambient temperature ①		media temperature	
		holding	inrush		min.	max.	min.	max.
code	-	holding	inrush	-	min.	max.	min.	max.
715Q	12v DC	14W	—	F 155°C	-10°C	+50°C	-10°C	+130°C
725Q	24v DC	14W	—					
775Q	230v DC	14W	—					
710Q	12v 50/60Hz	18VA	36VA					
720Q	24v 50/60Hz	18VA	36VA					
730Q	48v 50/60Hz	18VA	36VA					
740Q	110v 50Hz - 120v 60Hz	18VA	36VA					
760Q	200v 50Hz - 220v 60Hz	18VA	36VA					
770Q	230v 50Hz - 240v 60Hz	18VA	36VA	F 155°C	-10°C	+60°C	-10°C	+130°C
725R	24v DC	10W	—					
720R	24v 50Hz	15VA	30VA					
740R	110v 50Hz - 120v 60Hz	15VA	30VA					
770R	230v 50Hz - 240v 60Hz	15VA	30VA	H 180°C	-10°C	+70°C	-10°C	+130°C
725I	24v DC	14W	—					
720I	24v 50/60Hz	18VA	36VA					
740I	110v 50Hz - 120v 60Hz	18VA	36VA					
770I	230v 50Hz - 240v 60Hz	18VA	36VA	H 180°C	-10°C	+70°C	-10°C	+130°C
71Z1	12v DC	22W	—					
72Z1	24v DC	22W	—					
72K1	24v 50/60Hz	25VA	50VA					
74K1	110v 50Hz - 120v 60Hz	25VA	50VA					
77K1	230v 50Hz - 240v 60Hz	25VA	50VA					

① The manufacturer recommends a max. fluid temperature of 180°C when allowed by valve configuration

SERIES 7000 - Standard
 Connection: to DIN EN 175301-803 form A (ex DIN 43650-A)
OPTIONS
 Impregnated coils for humid environments (e.g. code D400)

SERIES 700R - UL approved
 UL approved coils recognized component, file number E193928

SERIES 7001 - Class 'H'
OPTIONS
 Impregnated coils for humid environments (e.g. code D701)

SERIES 7000 - High power
OPTIONS
 Impregnated coils for humid environments (e.g. code D7K1)

DIN CONNECTORS FOR M&M INTERNATIONAL SOLENOID VALVES

Coil connectors provide the safest flexible system for connecting M&M International solenoid valves and give a protection class of IP65. They are designed and made of synthetic material offering a high level of electrical insulation. Compliance with UL 1977 and VDE Regulations.

COMMON FEATURES

- Rated voltage (max.): 250V AC / 300V DC
- Nominal current: 10 A (Rated) / 16A (max.)
- Wire cross-section: 1.5 mm² (max.)
- Cable entry: PG9 (6 ÷ 8 mm)
- Protection class: IP 65 (only with gasket)
- Insulation class: group C - VDE 0110
- Housing colour: black

OPTIONS

- Connectors with protection circuits
 - Connectors with LED
 - Connectors with flying leads
- Other versions available upon request and depending on quantity: please contact M&M Sales Department.

NOTES

Connectors are supplied with thermoplastic rubber bordered gasket, fixing screw and preinstalled position with ground H 12 (the connector can be spinned when connected)

TYPE: 600 001-




TYPE: 600 011-



DIMENSIONS & WEIGHTS	600001-		600011-	
A	[mm]	28.5	27.7	
B	[mm]	14.5	18	
C	[mm]	11	18	
D	[mm]	21.5	27.7	
E	[mm]	41.2	41	
F	[mm]	28.8	26.8	
G	[mm]	5.5	5.5	
weight	[kg]	0.019	0.020	

TYPE: 600 001-

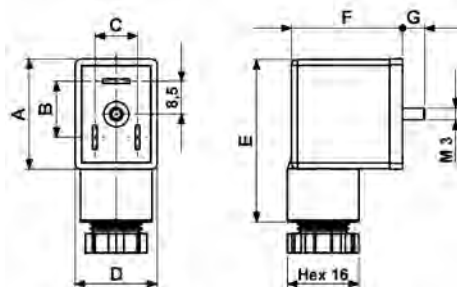

TYPE: 600 011-

