

-20°C ÷ 70°C

From tube Ø4 to Ø8mm
15 Bar up to 50°C & 10 Bar >50°C
From tube Ø10 to Ø12mm
10 Bar up to 50°C & 6 Bar >50°C

Compressed air

Manual and screwdriver

Parallel BSPP ISO 228
from G1/8" to G1/2"
Metric ISO 262 M5

PA, PU

Body: brass UNI EN 12164 CW614W
Lock claw: stainless steel AISI 316
Seal: NBR silicon free





Products in compliance with the directive 2002/95/EC

RoHS2

Products in compliance with the directive 2011/65/EU

OTSC-G



Manual swivel flow regulator BSPP thread for cylinders

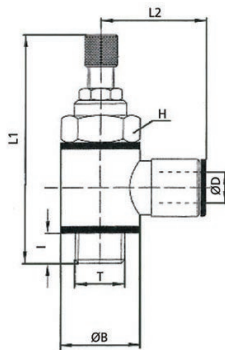

CODE	ØD	T	I	ØB	L1	L2	H	NL/MIN	GR.
OTSC04G01	4	G1/8"	5	14	49	20,5	14	310	36
OTSC06G01	6	G1/8"	5	14	49	23	14	390	38
OTSC06G02	6	G1/4"	6	18	56,5	24	17	710	65
OTSC08G01	8	G1/8"	5	14	49	24,5	14	390	39
OTSC08G02	8	G1/4"	6	18	56,5	26	17	810	66
OTSC10G02	10	G1/4"	6	18	56,5	27	17	810	69
OTSC12G02	12	G1/4"	6	18	56,5	28	17	810	70

OTSC-G-IN

Manual swivel flow regulator BSPP thread for valves



CODE	ØD	T	I	ØB	L1	L2	H	NL/MIN	GR.
OTSC04G01IN	4	G1/8"	5	14	49	20,5	14	310	36
OTSC06G01IN	6	G1/8"	5	14	49	23	14	390	38
OTSC06G02IN	6	G1/4"	6	18	56,5	24	17	710	65
OTSC08G01IN	8	G1/8"	5	14	49	24,5	14	390	39
OTSC08G02IN	8	G1/4"	6	18	56,5	26	17	810	66
OTSC10G02IN	10	G1/4"	6	18	56,5	27	17	810	69
OTSC12G02IN	12	G1/4"	6	18	56,5	28	17	810	70

