



-5°C ÷ 70°C



from 0 to 10 Bar



Compressed air, lubricated compressed air, various gases compatible with construction materials (except gases which can be dangerous for people and things).



Parallel gas BSPP ISO 228 from G1/4" to G1/2"



Indication of the fluid direction engraved on the body.



Pin: brass chrome plated

Slider: red painted aluminium

Seals: NBR 70

Elastic ring: stainless steel AISI 302

Cursor: brass chrome plated

Spring: stainless steel AISI 302

Available on demand with lockable





Products in compliance with the directive 2002/95/EC

RoHS2

Products in compliance with the directive 2011/65/EU



SECURITY

The double block system avoid the accidental valve opening or closing.

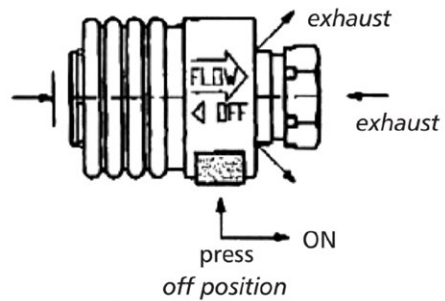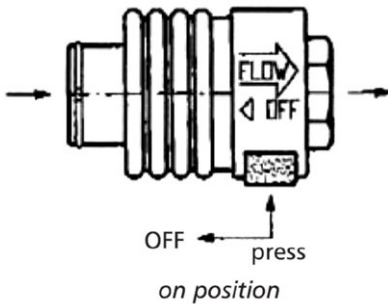

1605

Slide valve with security block BSPP thread

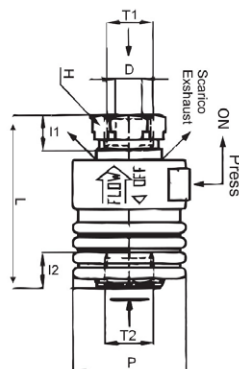

CODE	T1	T2	L	I1	I2	D	P	H	GR.
1605TR14	G1/4"	G1/4"	46	9,5	9,5	8	30	17	86
1605TR38	G3/8"	G3/8"	52	10,5	10,5	10	35	21	127
1605TR12	G1/2"	G1/2"	62	12,0	12,0	12,5	40	26	204

