

0°C ÷ 90°C



From G3/8" to G1": 16 Bar
From G1-1/4" to G2": 10 Bar
From G2-1/2" to G4": 8 Bar




Air, neutral gases and water



Parallel BSPP UNI ISO 228/1
from G3/8" to G4"



One way fluids flow.
Indication of the fluid direction
engraved on the body.

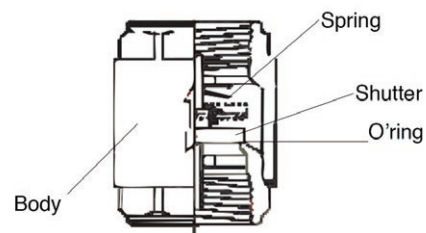

Available on demand stainless steel shutter



Body: yellow brass
Shutter: acetal copolymer
Spring: AISI 302
O'ring: NBR





Products in compliance with
the directive 2002/95/EC

RoHS2

Products in compliance with
the directive 2011/65/EU

1705L



CODE	T	F	I	L	GR.
1705TR38L	G3/8"	12	29	46	35
1705TR12L	G1/2"	12	30	48	110
1705TR34L	G3/4"	14	37	53	150
1705TR1L	G1"	15	44	59	240
1705TR114L	G1"-1/4"	14	56	66	360
1705TR112L	G1"-1/2"	15	63	71	480
1705TR2L	G2"	14	78	80	700
1705TR212L	G1"-1/2"	16	103	93	380
1705TR3L	G3"	18	120	104	850
1705TR4L	G4"	20	155	119	1050

Check valve BSPP thread in yellow brass

