

VITON: from -20°C to 205°C
EPDM: from -40°C to 130°C



20 Bar




Compressed air, water, gases and weak acids in corrosive environments and fluids compatible with construction materials.



Parallel BSPP UNI ISO 228/1 from G1/8" to G1"



One way fluids flow.
 Indication of the fluid direction engraved on the body.

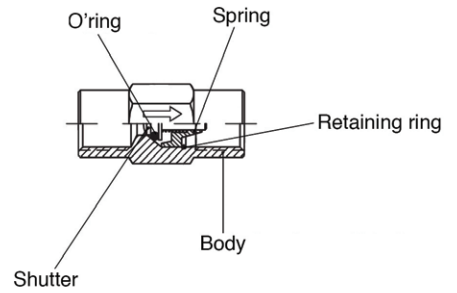

- Body:** stainless steel AISI 303
- Shutter:** stainless steel AISI 303
- Spring:** stainless steel AISI 302
- O'ring:** VITON
- Retaining ring:** stainless steel AISI 302

ADVANTAGES

- Available with VITON or EPDM o'rings.
- On demand available different springs for different opening pressures.
- Available to be supplied degreased.
- Available on demand also for NPT thread



Products in compliance with the directive 2002/95/EC

RoHS2


Products in compliance with the directive 2011/65/EU

MINIMUM OPEN PRESSURE

1/8	1/4	3/8	1/2	3/4	1
0.35	0.30	0.25	0.08	0.10	0.80

1710

Check valve BSPP thread Inox AISI 303



CODE	T	L	H	GR.
1710TR18	G1/8"	40,0	17	48,0
1710TR14	G1/4"	41,0	17	43,0
1710TR38	G3/8"	47,0	22	82,0
1710TR12	G1/2"	56,0	27	143,0
1710TR34	G3/4"	66,5	36	325,0
1710TR1	G1"	79,0	41	388,0

